




(T6EDC)

三聯葉片泵

T67DBB, T67DCB, T6DCC 系列
T67DDBS, T6DDCS 系列
T67EDB(S), T6EDC(S) 系列

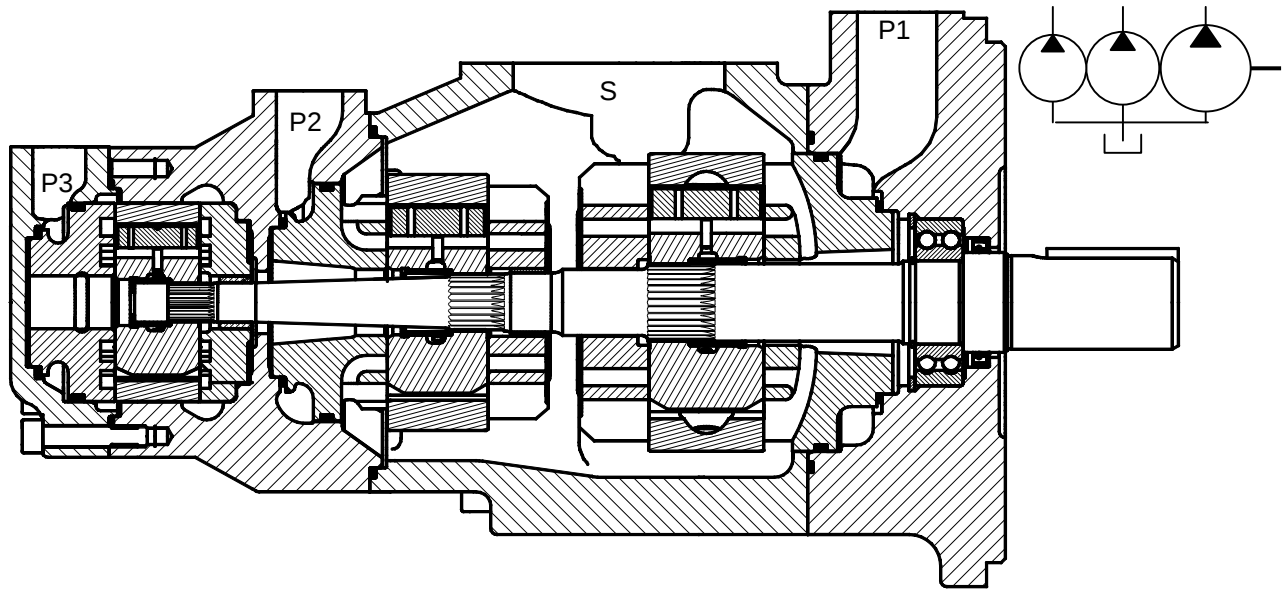

型號說明

例：T6EDC-072-025-020-1R00-A1F0

1. T6EDC-072-025-020-1R00-A1F0 系列號

SAE 安裝型式	T67DBB	T67DCB	T6DCC
	T67DDBS	T6DDCS	
ISO 安裝	T67EDB	T6EDC	

2. T6EDC-072-025-020-1R00-A1F0 泵芯規格

B	C	D	E
B02 5.8	003 10.8	014 47.6	042 132.3
B03 9.8	005 17.2	017 58.2	045 142.4
B04 12.8	006 21.3	020 66.0	050 158.5
B05 15.9	008 26.4	024 79.5	052 164.8
B06 19.8	010 34.1	028 89.7	057 179.8
B07 22.5	012 37.1	031 98.3	062 196.7
B08 24.9	014 46.0	035 111.0	066 213.3
B10 31.8	017 58.3	038 120.3	072 227.1
B12 41.0	020 63.8	042 136.0	085 269.0
B15 50.0	022 70.3	045 145.7	
	025 79.3	050 158.0	
	028 88.8		
	031 100.0		

3. T6EDC-072-025-020-1R00-A1F0 軸伸形式

4. T6EDC-072-025-020-1R00-A1F0 轉向

順時針	R
逆時針	L

5. T6EDC-072-025-020-1R00-A1F0 油口

6. T6EDC-072-025-020-1R00-A1F0 設計號

7. T6EDC-072-025-020-1R00-A1F0 密封等級


丁晴橡膠：礦物油	1
氟橡膠：礦物油和防火油液	5

8. T6EDC-072-025-020-1R00-A1F0 連接型式

		P3 = 3/4"		P3 = 1"	
		公制	UNC	公制	UNC
T67DBB	法蘭式安裝	M1	01	-	-
T67DCB	法蘭式安裝	M1	01	M0	00
T6DCC	法蘭式安裝	M1	01	M0	00
T6DDCS	法蘭式安裝	M1	01	-	-
T67DDBS	法蘭式安裝	M1	01	-	-
T67EDB	法蘭式安裝	F1	-	-	-
	支座安裝	P1	-	-	-
T6EDC	法蘭式安裝	F1	-	F0	-
	支座安裝	P1	-	P0	-
T6EDCS	法蘭式安裝		F1	-	F0
	支座安裝		P1	-	P0

油口	00	01	02	03


葉片泵 - 三聯泵

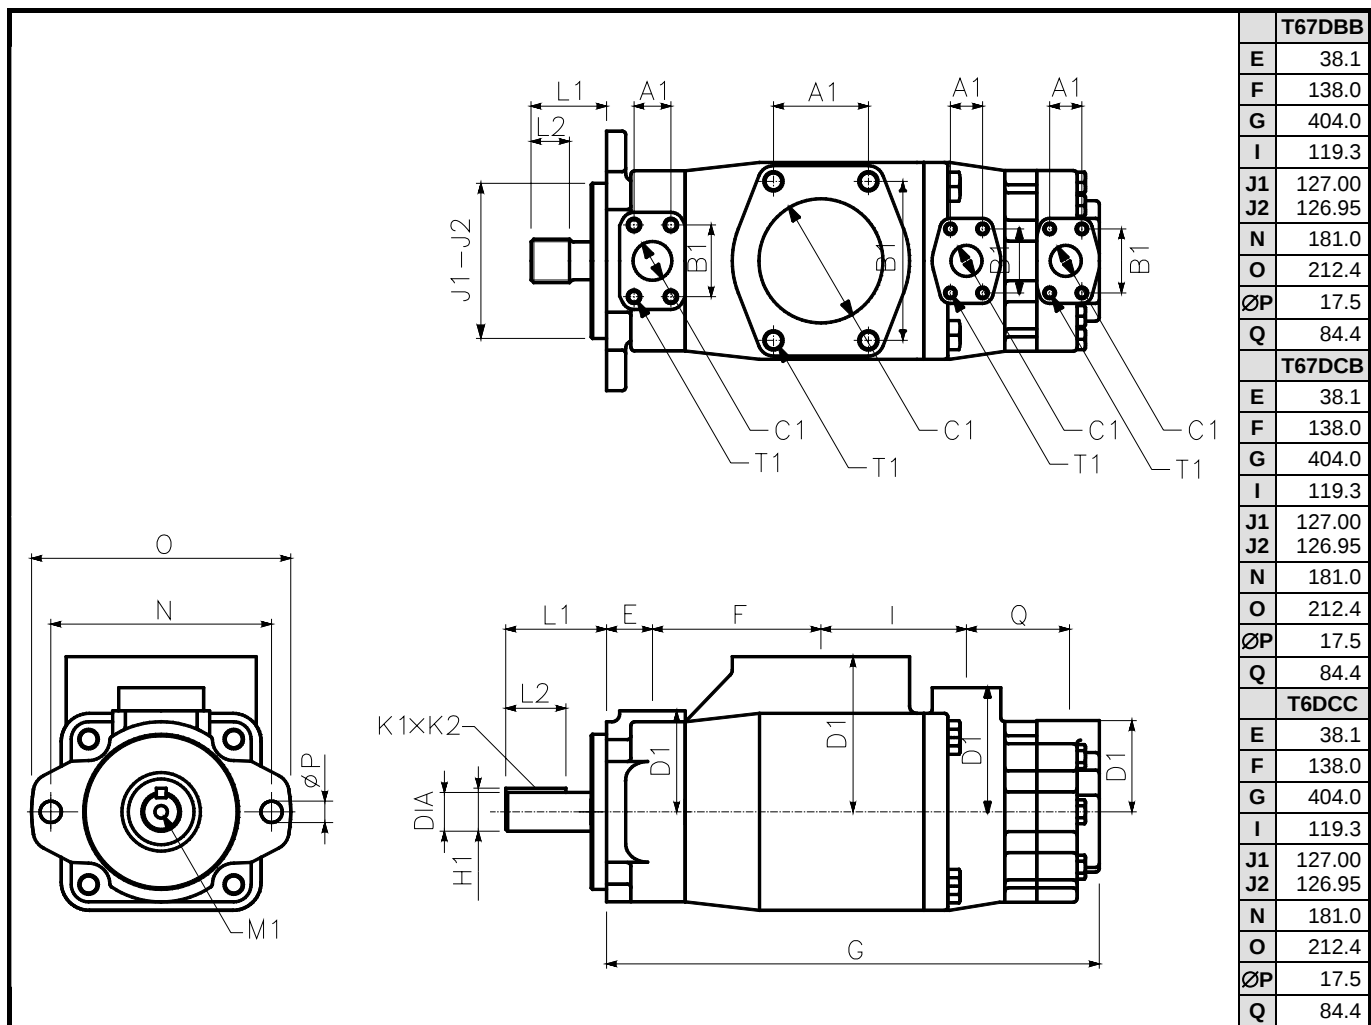

軸伸		最大扭矩 (N.m)		尺寸 (mm)					
		T67DBB T67DCB	T6DCC	L1	L2	直径	K1 x K2	H1	M1
1	平鍵 : No SAE (Ø31)	721	721	83.6	49.3	31.750 – 31.700	6.35 x 6.30	34.6	
2	平鍵 : SAE CC (Ø38)	1108	1108	89.7	50.8	38.100 – 38.075	9.52 x 9.47	42.4	
3	花鍵 : SAE C	●	●	55.2	38.0	Class 1-J498b, 12/24 d.p. - 14 牙			
4	花鍵 : SAE CC	●	●	61.0	31.5	Class 1-J498b, 12/24 d.p. - 17 牙			
6	花鍵 : No SAE		●	76.0	48.0	Class 1-J498b, 12/24 d.p. - 14 牙			

油口			尺寸 (mm)					
			A1	B1	ØC1	D1	T1 口螺纹	
							公制	UNC
T67DBB T67DCB	P1	1 ¼"	30.2	58.7	31.8	82.6	M12 x 22.3	⁷ / ₁₆ "-14UNC x 22.3
	P2	1"	26.2	52.4	25.0	101.6	M10 x 19.0	³ / ₈ "-16UNC x 19.0
	P3	¾"	22.2	47.7	19.0	74.7	M10 x 19.0	³ / ₈ "-16UNC x 19.0
	S	4"	77.8	130.2	101.6	127.0	M16 x 30.0	⁵ / ₈ "-11UNC x 30.0
T6DCC	P1	1 ¼"	30.2	58.7	31.8	82.6	M12 x 22.3	⁷ / ₁₆ " - 14UNC x 22.3
	P2	1"	26.2	52.4	25.0	101.6	M10 x 19.0	³ / ₈ "-16UNC x 19.0
	P3	M1-01 : ¾"	22.2	47.7	19.0	74.7	M10 x 19.0	³ / ₈ "-16UNC x 19.0
		M0-00 : 1"	26.2	52.4	25.4			
	S	4"	77.8	130.2	101.6	127.0	M16 x 30.0	⁵ / ₈ "-11UNC x 30.0


葉片泵 - 三聯泵

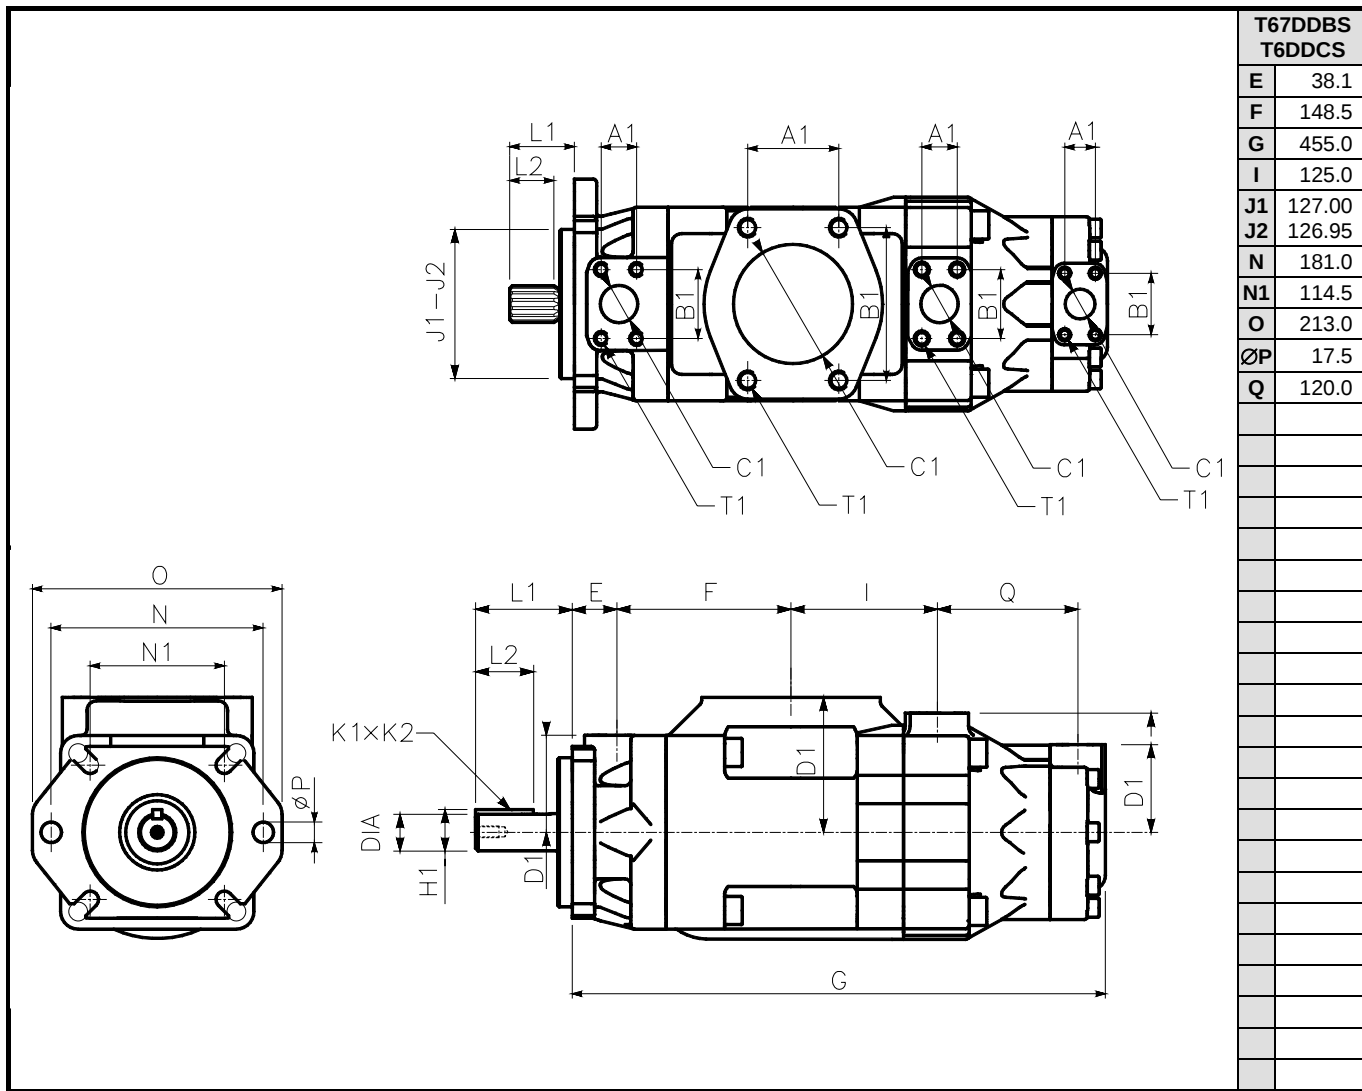

軸伸		最大扭矩 (N.m)	尺寸 (mm)					
		T67DDBS / T6DDCS	L1	L2	直径	K1 x K2	H1	M1
1	平键 : SAE-C	686	84.0	49.3	31.750 - 31.700	7.94 x 7.89	35.27	M10 x 20
2	平键 : SAE-CC	1148	91.0	50.8	38.100 - 38.050	9.52 x 9.47	42.36	M10 x 20
5	平键 : non SAE	883	84.0	60.0	34.900 - 34.850	7.94 x 7.89	38.42	M10 x 20
3	花键 : SAE-C	971	56.0	38.0	Class 1-J498b, 12/24 d.p. - 14 牙			
4	花键 : SAE CC	●	46.0	31.5	Class 1-J498b, 12/24 d.p. - 17 牙			

油口			尺寸 (mm)					
			A1	B1	ØC1	D1	T1 口螺纹	
							公制	UNC
T67DDBS	P1	1 ¼"	30.2	58.7	31.8	82.6	M12 x 22.3	7/16" - 14UNC x 22.3
	P2	1 ¼"	30.2	58.7	31.8	101.6	M12 x 24.0	7/16" - 14UNC x 24.0
	P3	M1-01 : ¾"	22.2	47.7	19.0	74.7	M10 x 19.0	3/8" - 16UNC x 19.0
	S	4"	77.8	130.2	101.6	115.0	M16 x 30.0	5/8" - 11UNC x 30.0
T6DDCS	P1	1 ¼"	30.2	58.7	31.8	82.6	M12 x 22.3	7/16" - 14UNC x 22.3
	P2	1 ¼"	30.2	58.7	31.8	101.6	M12 x 24.0	7/16" - 14UNC x 24.0
	P3	M1-01 : ¾" M0-00 : 1"	22.2 26.2	47.7 52.4	19.0 25.4	74.7	M10 x 19.0	3/8" - 16UNC x 19.0
	S	4"	77.8	130.2	101.6	115.0	M16 x 30.0	5/8" - 11UNC x 30.0

葉片泵 - 三聯泵

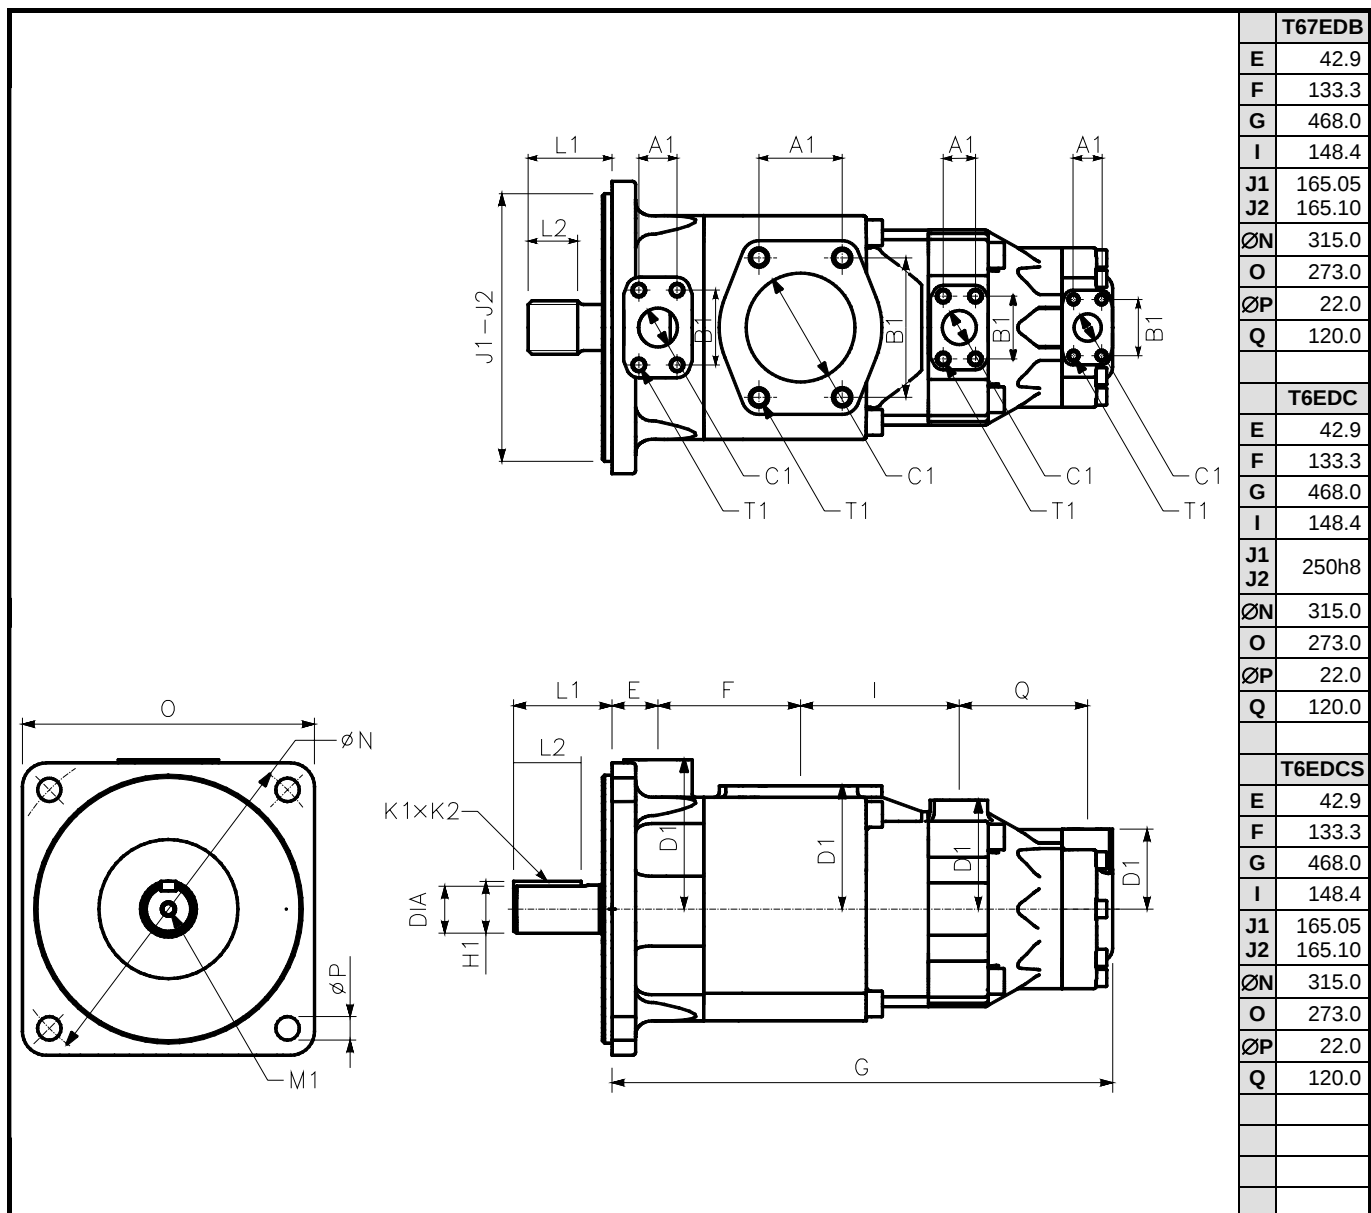

軸伸		扭矩 (N.m)		尺寸 (mm)					
		T67EDB T6EDC	T6EDCS	L1	L2	直径	K1 x K2	H1	M1
1	平鍵 : ISO3019 (Ø45)	●	●	92.0	63.0	45h7	14h8	48.5	M12 x 24.0
2	平鍵 : SAE- D		●	100.0	63.5	44.450 - 44.400	11.11 x 11.06	49.3	½"UNCx24.0
3	花鍵: SAE D & E		●	75.0	48.8	Class 1-J498b, 8/16 d.p. - 13 牙			

油口			尺寸 (mm)					
			A1	B1	ØC1	D1	T1 口螺紋	
							公制	UNC
T6EDC T6EDCS	P1	1 ½"	35.7	69.8	37.1	139.7	T6EDC : M12 x 30.0	T6EDCS : ½"-13UNC x 30.0
	P2	1 ¼"	30.2	58.7	31.8	101.6	T6EDC : M12 x 24.0	T6EDCS : 7/16"-14UNC x 24.0
	P3	F1-P1 : ¾"	22.2	47.7	19.0	74.7	T6EDC : M10 x 19.0	T6EDCS : 3/8"-16UNC x 19.0
		F0-P0 : 1"	26.2	52.4	25.4			
	S	4"	77.8	130.2	101.6	115.0	T6EDC : M16 x 30.0	T6EDCS : 5/8"-11UNC x 30.0